

NEW YORK STATE DEPARTMENT OF ENVIRONMENTAL CONSERVATION

(1) County Putnam

(3) DEC Well Number

P1544

(2) Township Brewster

WELL COMPLETION REPORT

| | | | | | |
|--|---|--|--|---------------------|--|
| (4) OWNER PJB Development Corp. | | LOG * | | | |
| (5) ADDRESS C/O Hogan & Rossi, 1441 Rte 22, Suite 204B, Brewster, NY 10509 | | Ground Surface EL. _____ ft. above sea level | | | |
| (6) LOCATION OF WELL (Also see reverse) Middlebranch Manor, Lot #2, Brewster, NY | | Top Of Casing is located <u>+1</u> ft. above (+) or below (-) ground surface | | | |
| (7) DEPTH OF WELL BELOW LAND SURFACE (Feet) 365' | (8) DEPTH TO GROUNDWATER BELOW LAND SURFACE (Feet) N/A | TOP OF WELL | | | |
| GASINGS | | 0' Drilling in overburden clay and boulders | | | |
| (9) DIAMETER 6" in. in. in. in. | | | | | |
| (10) LENGTH 72' ft. ft. ft. in. | | | | | |
| (11) GROUT TYPE portland cement | (12) GROUT INTERVAL (Feet) FROM 20' TO 72' | 20' Drilling in rock for casing | | | |
| SCREENS | | | | | |
| (13) MAKE & MATERIAL | (14) OPENINGS | | | | |
| (15) DIAMETER in. in. in. in. | | 72' Set 72' of 6" casing | | | |
| (16) LENGTH ft. ft. ft. in. | | | | | |
| (17) DEPTH TO TOP OF SCREEN, FROM TOP OF CASING (Feet) | | | | | |
| YIELD TEST | | Drilling in rock granite | | | |
| (18) DATE 8/28/00 | (19) DURATION OF TEST 6 hour | | | | |
| (20) LIFT METHOD <input checked="" type="checkbox"/> Pump <input type="checkbox"/> Air Lift <input type="checkbox"/> Ball | (21) STABILIZED DISCHARGE (GPM) 15 gpm | | | | |
| (22) STATIC LEVEL PRIOR TO TEST (feet/inches below top of casing) 20' | (23) MAXIMUM DRAWDOWN (Stabilized) (feet/inches below top of casing) 70' | | | | |
| (24) RECOVERY (Time in hours/minutes) 15 minutes | (25) Was the water produced during test discharged away from immediate area? Yes <input checked="" type="checkbox"/> No _____ | | | | |
| PUMP INSTALLATION | | | | | |
| (26) DATE | (27) PUMP INSTALLED? YES ___ NO <input checked="" type="checkbox"/> | | | (28) PUMP INSTALLER | |
| (29) TYPE | (30) MAKE | | | (31) MODEL | |
| (32) MAXIMUM CAPACITY (GPM) | (33) PUMP INSTALLATION LEVEL FROM TOP OF CASING (Feet) | | | | |
| (34) METHOD OF DRILLING <input checked="" type="checkbox"/> Rotary <input type="checkbox"/> Cable Tool <input type="checkbox"/> Other _____ | | (35) USE OF WATER (see instructions for choices) residential | | | |
| (36) DATE DRILLING WORK STARTED 8/23/00 | | (37) DATE DRILLING WORK COMPLETED 8/24/00 | | | |
| (38) DATE 2/7/01 | (39) DRILLER & COMPANY Malcolm T. Beal, Jr. P. F. Beal & Sons, Inc. | (40) DEC REGISTRATION NO. NYRD10105 | | | |
| * Show log of geologic materials encountered with depth below ground surface, water bearing beds and water levels in each; casings; screens; pump; additional pumping tests and other matters of interest, e.g., water quality (sulphur, salt, methane). Describe repair work. | | 365' BOTTOM OF HOLE | | | |
| See further instructions titled "Instructions for New York State Well Completion Report". | | ORIGINAL - DEC COPY | | | |

LOCATION OF WELL

(USE ONE OR MORE OF THE FOLLOWING METHODS)

DEC WELL #: P1544


Method 1: Enter coordinates of latitude and longitude in the area provided below. If driller has on-line capability, use DEC's on-line map coordinate assistant found on DEC's web site (www.dec.state.ny.us). This feature gives coordinates of latitude and longitude that can be entered in the area indicated. **NOTE:** The method of determining coordinates **MUST** be shown. The use of global positioning system (GPS) equipment is highly recommended to determine the latitude and longitude of the well. If a GPS is used, include information on the manufacturer and model of the unit.

Method 2: If method 1 is not used, photocopy a section of a 1:24,000 scale United States Geologic Survey (USGS) map or a 1:24,000 New York State Department of Transportation (NYSDOT) map and locate the well on the map. **Write the map name on the photocopy and attach to log completion.**

Method 3: If USGS or NYSDOT maps are not available, photocopy a pertinent section of a detailed county road map and locate the well on the map. **Write the map name on the photocopy and attach to log completion.**

Method 4: Sketch location of well in the area provided at bottom of page. Locate the well with respect to at least two roads. Indicate north direction.

| | |
|---|-------------------------------------|
| Latitude (degrees minutes seconds) | Longitude (degrees minutes seconds) |
| <div style="border: 1px solid black; width: 100%; height: 100%;"></div> | |
| Example: 42 36 01.7 N 73 24 51.1 W | |
| How were coordinates determined? | |
| <input type="checkbox"/> DEC on-line map coordinate assistant | |
| <input type="checkbox"/> GPS Manufacturer _____ Model _____ | |
| <input type="checkbox"/> Map interpolation | |

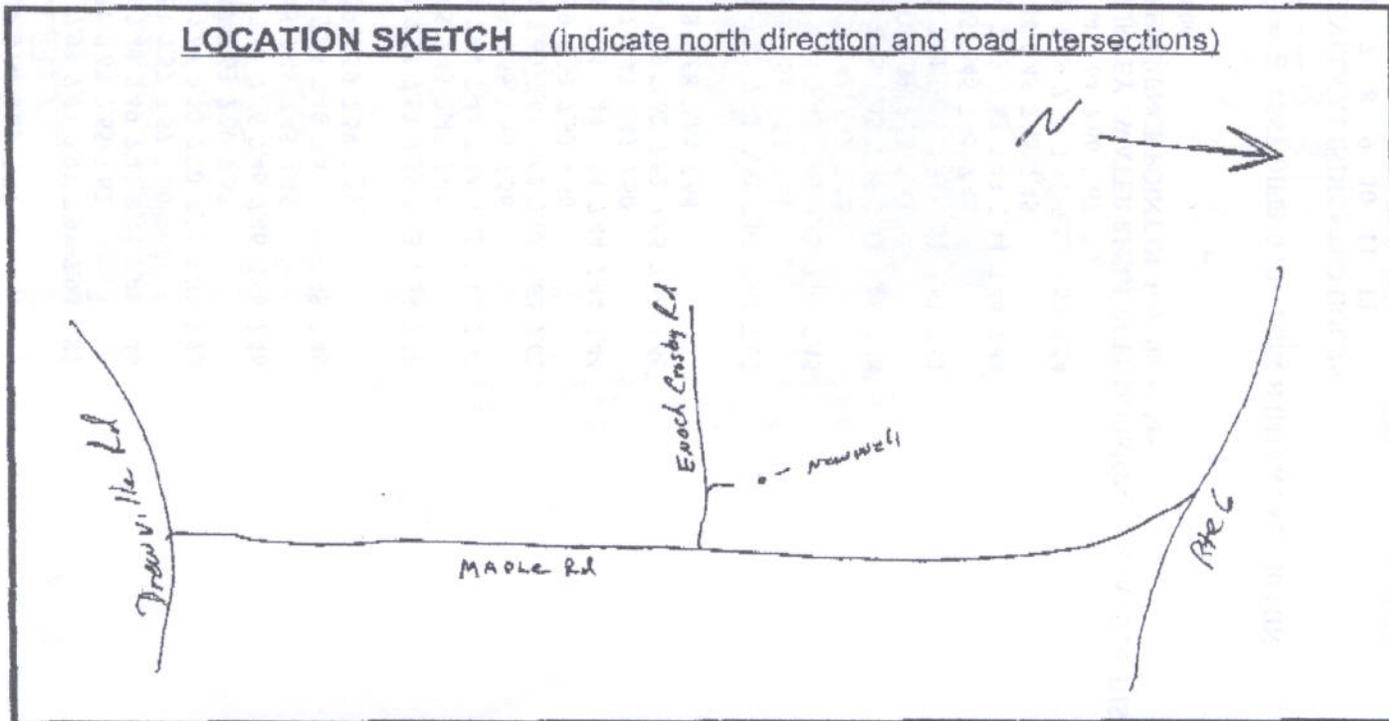



Yahoo! - Yellow Pages - Help

Powered by Mapquest.com (tm)

Y! DOMAINS:
Go global



GROCERY COUPONS!

\$1.50 Huggies Diapers




Welcome, Guest User
Yahoo! Maps

Create My Locations - Sign In

★ maple

Save This Address

MAPQUEST™

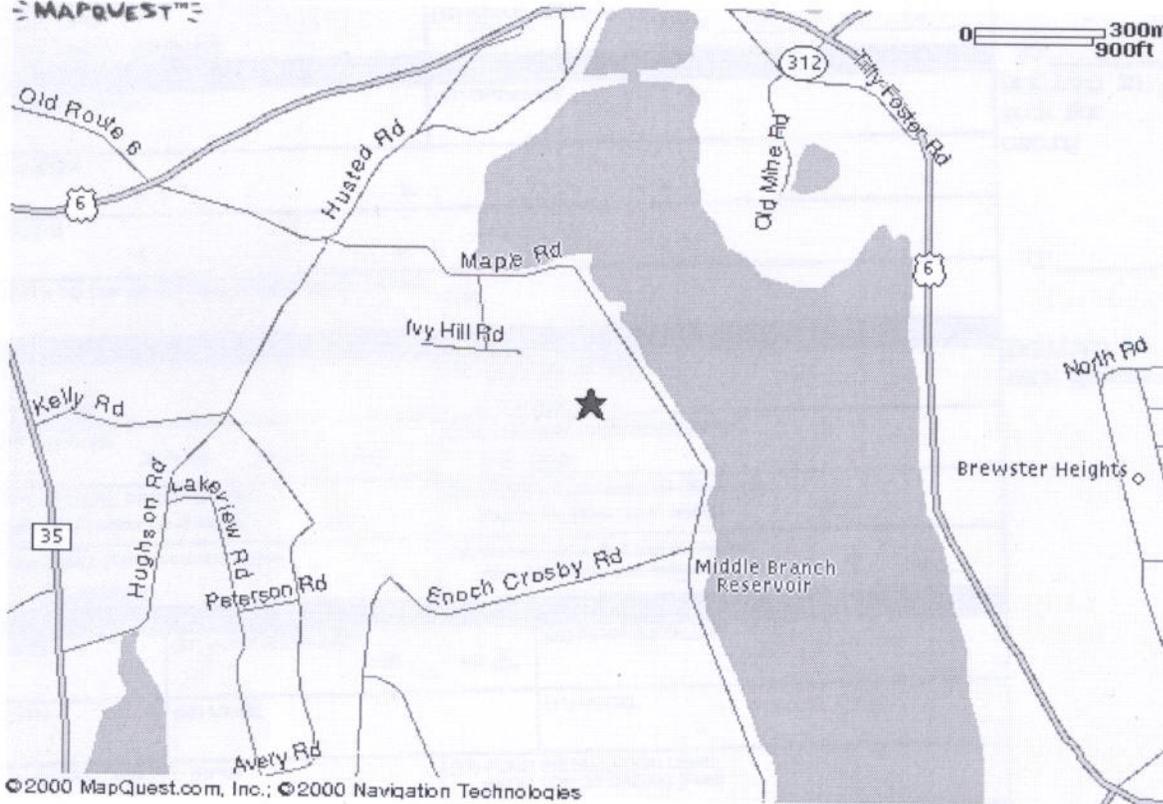

Zoom In

[1]

2

[3]

[4]

[5]

[6]

[7]

[8]

[9]

[10]

Zoom Out

Email Map

Interactive Ma


©2000 MapQuest.com, Inc.; ©2000 Navigation Technologies

Powered by Mapquest.com (tm) Terms of Use Copyright © 2001 NavTech.
Copyright © 2001 Yahoo! Inc. All rights reserved.
Privacy Policy - Terms of Service - Help

1544

has them for you!

Target is 41° 24' 13"N, 73° 39' 02"W - LAKE CARMEL quad [\[Quad Info\]](#)

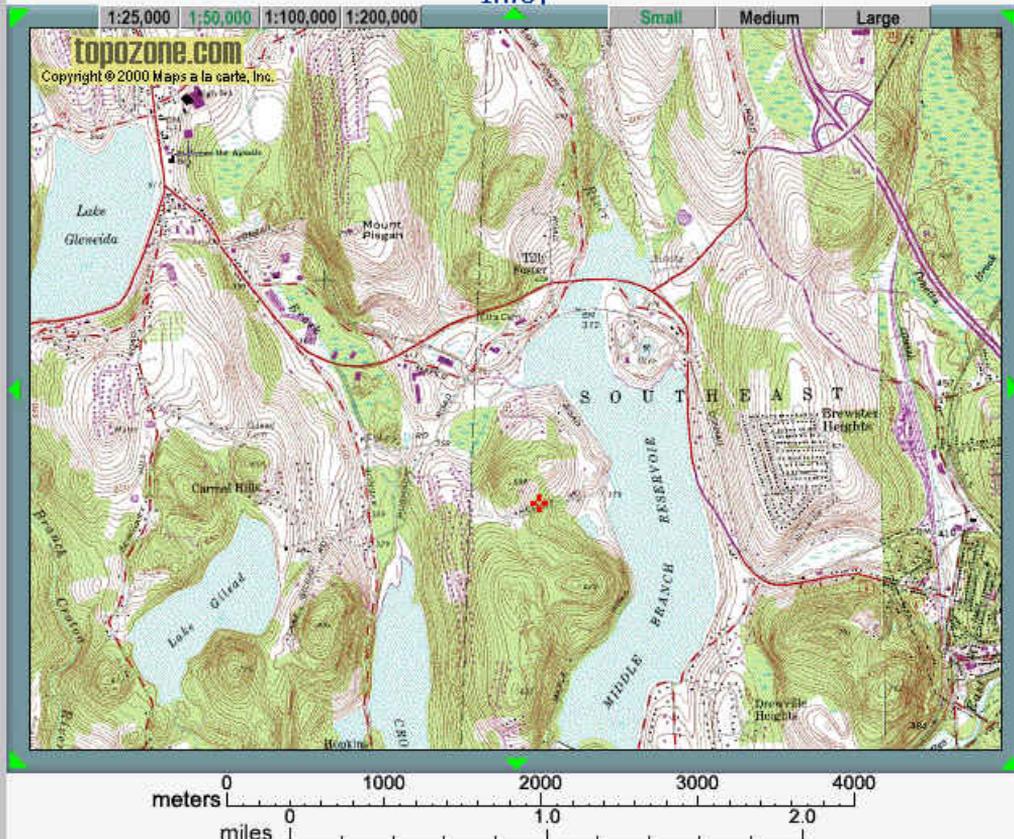

[Email this map](#)

[Bookmark this map](#)

[Print this map](#)